


200 W AIN Chip Attenuator TAP 30





Standards
NF C 96-315
MIL-DTL-3933



Substrate
Resistive film
Protection film
Contacts finition

AIN
Thick film
Epoxy
Tin over Nickel barrier

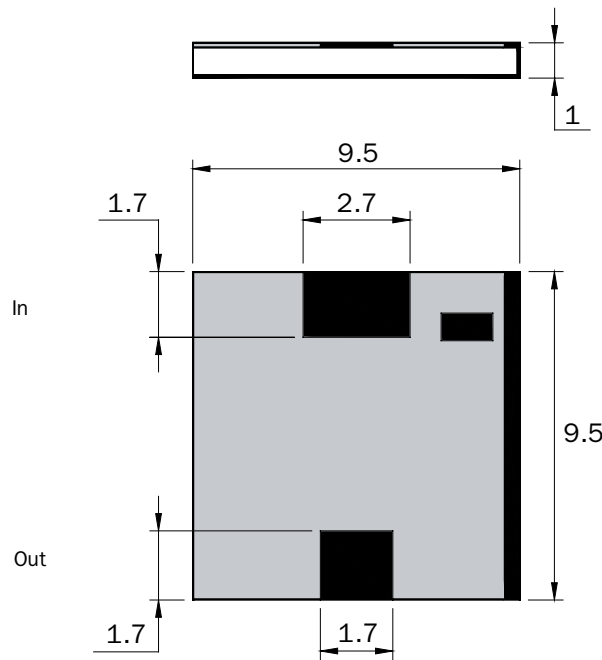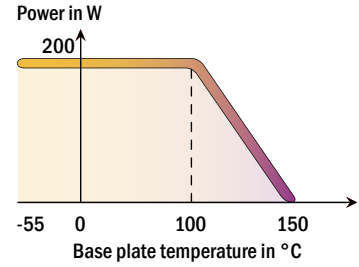

Dimensions in mm

mm	inch
1	0.039
1.7	0.067
2.7	0.106
9.5	0.374

P/N	Attenuation (dB)	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR IN	Accuracy $\pm \Delta\alpha$ (dB)
45-0016S	30	2.2	200	50	1.20	1.5

Available on Tap and Reel Packaging