



TITANIUM SUBMERSIBLE LEVEL TRANSMITTER

Model 313L-NI

FEATURES:


- All welded Titanium Construction
- Rugged, all encapsulated electronics

PRESSURE RANGES:

- From 0-1 through 0-300 psig

ACCURACY:

- $\pm 0.25\%$ FSO ($\pm 0.1\%$ optional)

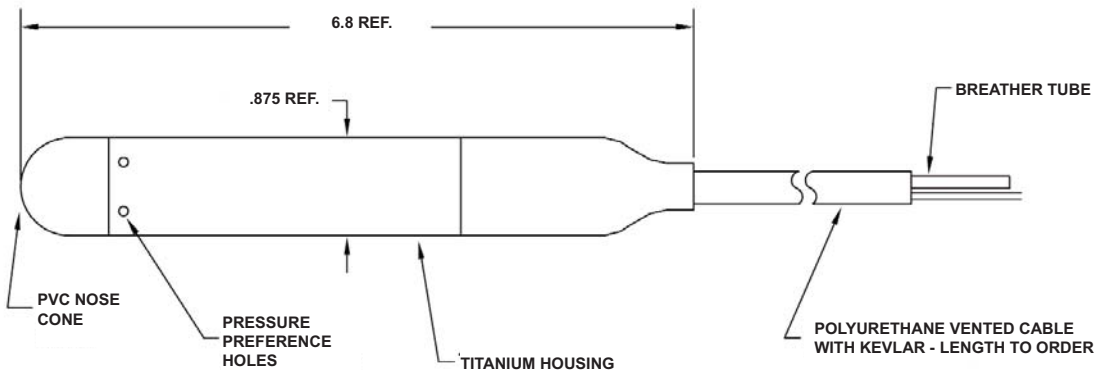

Some options will affect dimensions. Consult factory if important.

WIRING CODE

	313L-NI
RED	+ EXC./SIGNAL
GREEN	GND
BLACK	- EXC./SIGNAL
SHIELD	SHIELD

GP:50 reserves the right to make product improvements and amendments to the product specifications stated throughout this brochure without prior notification. Please contact the factory on all critical dimensions and specifications for verification.

INDUSTRIAL GRADE

