

- **For Extremely High-Volume Applications**
- **Ultra-Small, Low Cost OEM Pressure Die**


DESCRIPTION

The SM5108 is an extremely small (0.65 mm x 0.65 mm) silicon micromachined piezoresistive pressure sensing chip that has been optimized to provide the highest possible accuracy for a die of this size. This performance is achieved through careful resistor placement and mechanical configuration. The small die results in a significant cost saving when compared to larger sensor die. Over 24,000 die come on a 150 mm wafer.

This sensor is intended for high volume applications where cost is a critical factor, such as consumer tire pressure gauges or disposable pressure gauges. The SM5108 is available as an absolute pressure sensor in full-scale ranges of 15 PSI, 30 PSI, 60 PSI, and 150 PSI. It is designed to be mounted on ceramic or PC board substrates by high-volume OEM manufacturers.

Die are probed, diced, and visually inspected and shipped on tape in rings.

Minimum order quantities apply to this product.

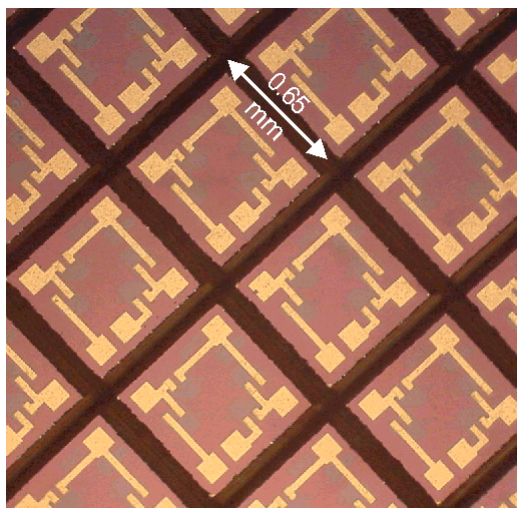

FEATURES

- Available in 15 PSI, 30 PSI, 60 PSI, and 150 PSI ranges
- Extremely Low Cost
- Small size (0.65 mm x 0.65 mm)
- Constant Current or Constant Voltage Drive
- High Millivolt Output

APPLICATIONS

- Automotive Tire Pressure Monitoring
- Engine Control
- Barometric Sensing
- Pneumatic Gages
- Hand-held Meters
- Home Appliances

CHARACTERISTICS FOR SM5108 - SPECIFICATIONS

All parameters are measured at 5.000V supply at room temperature, unless otherwise specified.

	Min.	Typ.	Max.	Units	Notes
Excitation Voltage	0	5.0	15	V	1
Excitation Current	0	1.5	2.5	mA	1
Span (FS Range)					5
15 PSI	65	100	135	mV	
30 PSI	65	100	135	mV	
60 PSI	65	100	135	mV	
150 PSI	100	150	200	mV	
Zero Offset	-35		35	mV	
TC Span	-24	-19	-15.5	%FS/100°C	3, 5
TC Offset	-7	-1	+7	%FS/100°C	3, 5
TC Resistance	+24	+27.5	+33	%/100°C	3, 5
Linearity	-0.2	-0.07	+0.2	%FS	4, 5
Bridge Impedance	4	5	6	kΩ	
Input Capacitance		<2		pF	5
Proof Pressure	3X			Rated FS	5
Burst Pressure	5X			Rated FS	5
Operating Temperature	-40		+125	°C	5
Storage Temperature	-40		+125	°C	5


Notes:

1. Bridge may be driven with positive or negative excitation; positive output for positive pressure applied to circuit side of die when bridge is driven with positive voltage.
2. Measured from 0 to 70°C
3. Defined as best straight line.
4. Tested on a sample basis.



Pressure Ranges

PSI	5108
15	015
30	030
60	060
150	150

ORDERING INFORMATION:

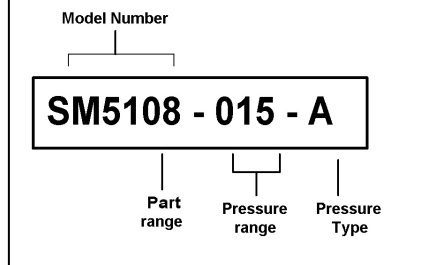

A: Absolute (only)

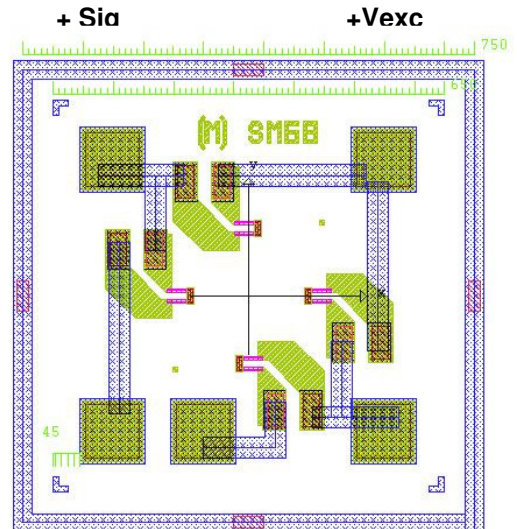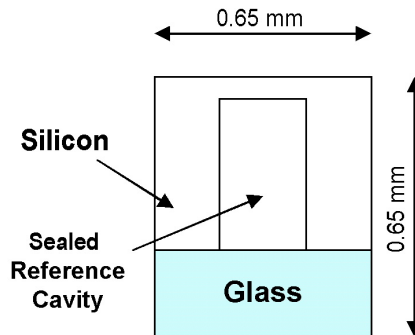

Top-View of SM5108
(0.65 mm square as sawn)
Total thickness = 0.65 mm
Covered under USA Mask-Copyright

NOTICE

Information in this document is provided solely to enable software and system implementers to use Silicon Microstructures, Inc. products and/or services. No express or implied copyright licenses are granted hereunder to design or fabricate any silicon-based microstructures based on the information in this document.

Silicon Microstructures, Inc. makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Silicon Microstructures, Inc. assume any liability arising out of the application or use of any product or silicon-based microstructure, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Parameters that may be provided in Silicon Microstructures, Inc. data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. Silicon Microstructures, Inc. assumes no responsibility for any inaccuracies and/or errors in this publication. All operating parameters, must be validated for each customer application by customer's technical experts. Silicon Microstructures, Inc. does not convey any license under its patent rights nor the rights of others. Silicon Microstructures, Inc. makes no representation that the circuits are free of patent infringement. Silicon Microstructures, Inc. products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Silicon Microstructures, Inc. product could create a situation where personal injury or death may occur. Should Buyer purchase or use Silicon Microstructures products for any such unintended or unauthorized application, Buyer shall indemnify and hold Silicon Microstructures, Inc. and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Silicon Microstructures, Inc. was negligent regarding the design or manufacture of the part. Silicon Microstructures, Inc. reserves the right to make changes without further notice to any products herein

Silicon Microstructures, Inc.TM and the Silicon Microstructures, Inc. logo are trademarks of Silicon Microstructures, Inc. All other service or product names are the property of their respective owners.
© Silicon Microstructures, Inc. 2001-2008. All rights reserved.