

Products & Services

Stainless steel shear beam load cell



SK30X

300 kg ... 5 t

- Stainless steel construction, hermetically sealed to IP68
 - Approved up to 6 000 d OIML R60 and 5 000 d NTEP
 - Current calibrated output signal for multi-cell mounting
 - Ideally suited for industrial weighing platforms
- Capacities : 300, 500 kg, 1 t, 2 t, 3 t, 5 t



DOWNLOADS

Application brochures

FA-Cuves
Process control application sheet
' , FULLHTML);" onmouseover="return nd();">FA-cuves-E-0907-web.pdf

Product datasheets

SK30X - 300 kg ... 2 t
SK30X load cell datasheet
' , FULLHTML);" onmouseover="return nd();">FT-SK30X-FE-1008.pdf

SK30X - 3 ... 5 t
SK30X 3 ... 5 t load cell datasheet
' , FULLHTML);" onmouseover="return nd();">FT-SK30X5t-FE-0708.pdf

Technical notes

NT-SHEAR
Technical note : Shear beam load cell technology
' , FULLHTML);" onmouseover="return nd();">NT-SHEAR-FE-0706.pdf

ACCESSORIES

Swivel foot for SK30X/A



LFA

300 kg ... 2 t

- made of stainless steel with elastomer pad
- Perfect prevention of unwanted forces
- Compact and easy to install
- Height adjustable by rotation

DOWNLOADS

Product datasheets

LFA
LFA scale foot datasheet
' , FULLHTML);" onmouseover="return nd();">FT-LFA-FE-0706.pdf

Compression mounting for SK30X/A



STABIFLEX-SK

300 kg ... 5 t

- Zinc plated steel or stainless steel construction
- Cross stoppers and lift-off prevention included
- Can act as a dummy load cell by tightening bolts up
- Ball-in-cup design for high accuracy weighing
- Ideally suited for tanks and hoppers weighing

DOWNLOADS

Application brochures

FA-Cuves
Process control application sheet
' , FULLHTML);" onmouseover="return nd();">FA-cuves-E-0907-web.pdf

Product datasheets

STABIFLEX-SK - 300 kg ... 5 t
STABIFLEX-SK mounting kit datasheet
' , FULLHTML);" onmouseover="return nd();">FT-STABIFLEX-SK-FE-0108.p...

Product user manuals

NU-STABIFLEX
Notice d'utilisation pour capteur de pesage F60X et SK30X : STABIFLEX
' , FULLHTML);" onmouseover="return nd();">NU-STABIFLEX-FE-108103B.p...

Compression mounting for SK30X/A



STABIFLEX-SK

300 kg ... 5 t

- Zinc plated steel or stainless steel construction
- Cross stoppers and lift-off prevention included
- Can act as a dummy load cell by tightening bolts up
- Ball-in-cup design for high accuracy weighing
- Ideally suited for tanks and hoppers weighing

DOWNLOADS

Application brochures

FA-Cuves
Process control application sheet
' , FULLHTML);" onmouseover="return nd();">FA-cuves-E-0907-web.pdf

Product datasheets


STABIFLEX-SK - 300 kg ... 5 t
STABIFLEX-SK mounting kit datasheet
' , FULLHTML);" onmouseover="return nd();">FT-STABIFLEX-SK-FE-0108.p...

Product user manuals

NU-STABIFLEX
Notice d'utilisation pour capteur de pesage F60X et SK30X : STABIFLEX
' , FULLHTML);" onmouseover="return nd();">NU-STABIFLEX-FE-108103B.p...

SERVICES

Weighing calibration

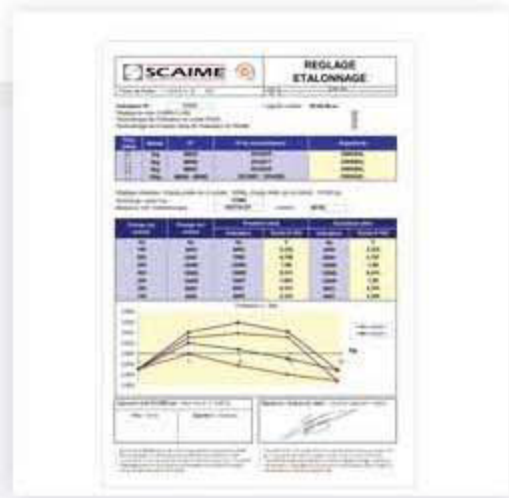

Calibration kg

500 g ... 20 t

- High level of accuracy and very limited incertitude
- 500 g to 6 t by load cell in tension, 500 g à 20 t in compression
- Multi-cell calibration capabilities, corner adjustment
- Mass and test means linked to the International standards
- 5 tons direct dead weights machine with temperature chamber
- 25 tons dead weights level machine with temperature chamber

DOWNLOADS

Product datasheets

Calibration
Calibration services datasheet
' , FULLHTML);" onmouseover="return nd();">FT-ETAL-FE-0404.pdf