



North Industrial Area P.O.Box 268 Or-Aqiva 30600 ISRAEL

Tel: + 972 (0) 462 63891 Fax: + 972 (0) 4626 3715

E-mail: rfq@time.co.il URL: http://www.time.co.il

Precise Clock Oscillators, Dual In Line Packages

MODEL	C8	C22	C50	C51	C52
FREQ' RANGE	1.00 to 200.00 MHz	400.00 to 800.00 MHz	1.00 to 200.00 MHz		
FREQ' STABILITY	Standard: ± 15 PPM Typ. See "How - To - Order" instructions				
FREQ' CALIBRATION AT +25°C	Typical: ± 15 PPM Best: ± 5 PPM				
FREQ' STABILITY VS. SUPPLY VARIATIONS	Typical: ± 5 PPM Best: ± 1 PPM				
FREQ' STABILITY VS. LOAD VARIATIONS	Typical: ± 3 PPM Best: ± 1 PPM				
AGING	Typical: ± 5 PPM/ year Best: ± 1 PPM/ year				
OPERATING TEMP' RANGE	See "How - To - Order" instructions				
OUTPUT WAVEFORM	HCMOS/ TTL Compatible High Level (Voh): 0.9 Vcc Min. Low Level (Vol): 0.1 Vcc Max. Symmetry: (50 \pm 10%) or (50 \pm 5%) Rise/ fall Time: 5nSec Max. ECL, PECL, and Sine Wave outputs are available too				
START UP TIME	10 mSec Max. at Min. Supply Voltage				
LOAD	50 pF				
SUPPLY VOLTAGE	+5.0V		+3.3V	+5.0V	+3.3V
SUPPLY CURRENT	15 mA Max. for F < 25.00 MHz 25 mA Max. for frequencies between 25.00 MHz to 40.00 MHz 45 mA Max. for F > 40.00 MHz				
ENABLE / DISABLE	N/A		Enable: High (above 2.2V) or open Disable: Low (below 0.8V)		
PACKAGE	DIL 14				

Environmental Conditions

SHOCK

IEC 68-2-27 (Test Ea) 30G, 18 mSec, Half Sine

VIBRATION

IEC 68-2-6 (Test Fc), 0.35mm, 5G, 10-2000Hz, 6 cycles/ axis

THERMAL SHOCK

IEC 68-2-14 (Test Na), 30 min. in each extreme temperature

SEAL

IEC 68-2-17 (Test Qc method 2)

SALT MIST

IEC 68-2-11 (Test Ka), 96 hours

SOLDERING HEAT


IEC 68-2-20A (230°C± 5°C 10 ±1)

C8, C50, C51, C52

C8, C52	
Pin	Function
1	N/C or Output ~
7	GND
8	Output
14	Vcc

C50, C51	
Pin	Function
1	E/D
7	GND
8	Output
14	Vcc


Dimensions in mm.

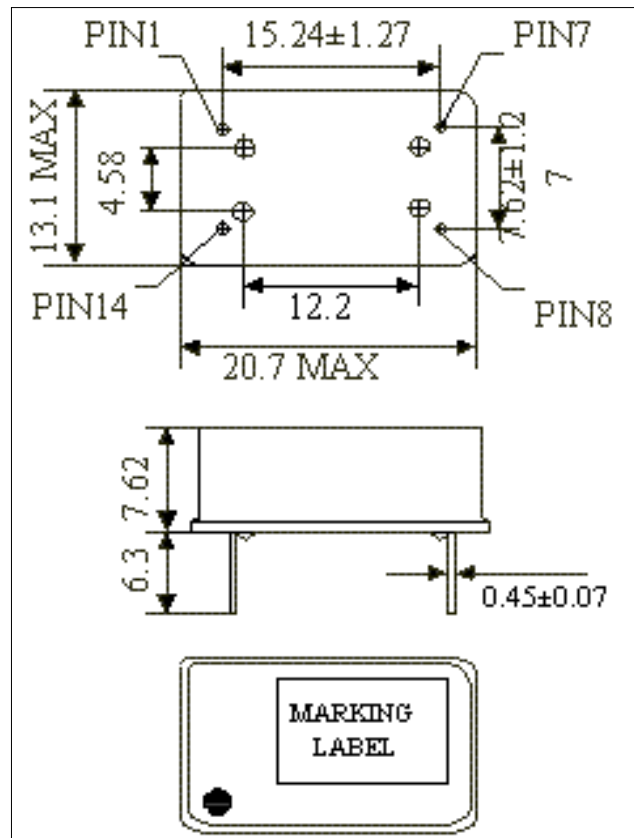

C22

C22	
Pin	Function
1	N/C or Output ~
7	GND
8	Output
9	Output ~
14	Vcc

Dimensions in mm.

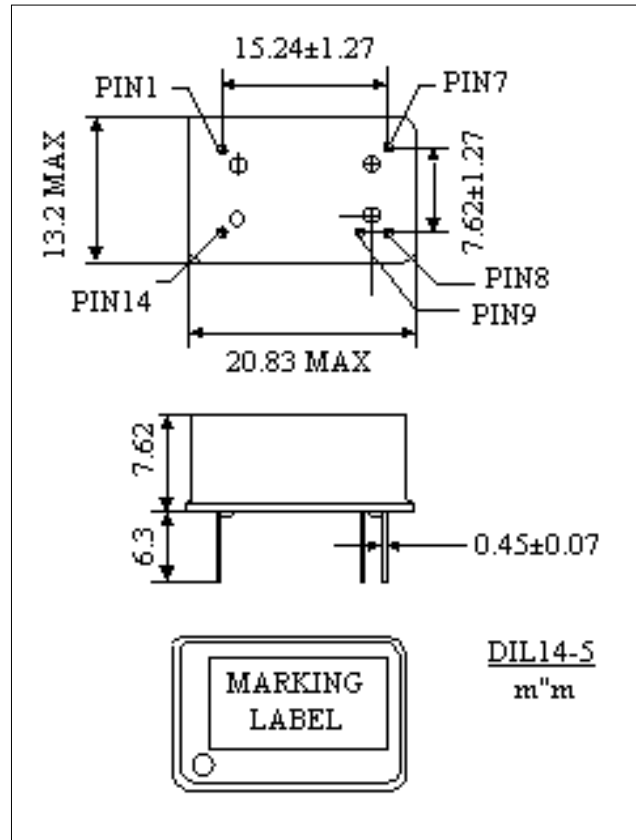

[Precise Clock Oscillators, Dual In Line Packages](#)

[to top](#)